

Cummins QSK 60 G4	CGT Stamford PI 734	Generator Model:	G2250SCU5
----------------------	------------------------	---------------------	------------------

50 Hz	3-Phase	Power Factor Cos Φ = 0.8	Emissions Non-Certified
-------	---------	----------------------------------	----------------------------

RATINGS	PRIME POWER (PRP)		STANDBY POWER (ESP)		
	G2250SCU5				
Voltage	kVA	kWe	kVA	kWe	Amps
415/240	2000	1600	2250	1800	3130
400/230	2000	1600	2250	1800	3248
380/220	2000	1600	2200	1760	3343

Definition of Ratings & Reference Conditions


Prime Power (PRP) is the nominal output continuously available, where the average load (variable) does not exceed 70% of the prime power rating during an operating period of 250 hours. The total operating time at 100% prime power must not exceed 500 hours per year. A 10% overload is available for a maximum of 1 hour in 12 hours of operation and must not exceed a total of 25 hours per year.

Standby Power (ESP) is the maximum output available (at variable load), for up to 200 hours per year. The average load (variable) must not exceed 80% of the standby power rating, with less than 25 hours per year at the full standby rating. No overload is available. The genset must not operate, at standby rating, in parallel with the public utility under any circumstances.

Standard Reference Conditions: air temperature 25°C (77°F), barometric pressure 100kPa [110m (361ft) altitude], 30% relative humidity.


Note: The above ratings may be subject to derate at different operating conditions. Please see the Derate Guidelines on the Broadcrown website.

All power ratings and reference conditions in accordance with ISO 8528-1 and ISO 3046-1.



Key Features:

- Efficient water cooled diesel engine.
- Single bearing CGT Stamford alternator
- Radiator with pressure cap and drain point
- Fully guarded engine-driven fan
- Fully welded steel baseframe with lifting / jacking points
- Various fuel system options
- Heavy duty rubber anti-vibration mountings
- 24V starter batteries and connecting cables
- Separate engine-driven battery charging alternator
- Spin on oil and fuel filters and dry type air filter element
- Auto Start control system with digital instrumentation
- Factory Test Certificate
- Operation & Maintenance Manual
- Wide range of optional extra features available

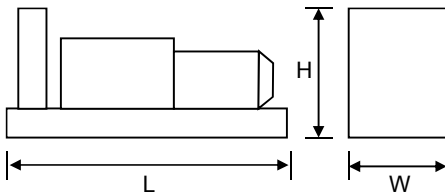

Overall Dimensions & Weights - Open Set
Length (L) = 5900mm
Width (W) = 2336mm
Height (H) = 2865mm
Dry Weight (inc oil) = 13550kg
Operating Weight = 14205kg

	Typical Open Generator Sound Pressure Level at 1m, Free Field (dB)							
Overall dBA	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
115	100	105	107	107	108	108	107	110

All specifications and design are subject to change without notice



G2250SCU5

Jan 2017

ENGINE & COOLING SYSTEM

CUMMINS QSK 60 G4

	SI Units	PRIME	STANDBY	
Performance	Engine Speed	1500		
	Gross Power	1730	1915	
	Fan Power	29	29	
	Net Power	1701	1886	
	Emissions Certification	—		
	Altitude Capability	m	1300	1300
General	Cylinders / Type	16 cyl / 60° Vee / 4-stroke		
	Aspiration / Charge Cooling	Turbocharged / Two Pump Two Loop		
	Governing / Engine Management	Electronic Governor / ECU		
	Bore / Stroke	159 / 190		
	Cubic Capacity	60.2		
	BMEP	kPa	2293	2538
Fuel	Fuel Consumption at 100% Power	litres/h	394	437
	Fuel Consumption at 75% Power	litres/h	291	323
	Fuel Consumption at 50% Power	litres/h	200	222
	Total fuel flow	litres/h	1893	
	Standard Fuel Tank Capacity	litres	N/A	
Air	Engine Air Flow	m³/s	2.264	2.41
	Maximum Air Intake Restriction (used filter)	kPa	6.23	
Exhaust	Exhaust Gas Flow	m³/s	5.19	5.61
	Exhaust Gas Temperature	°C	430	450
	Maximum Exhaust Back Pressure	kPa	6.8	
	Typical Exhaust Pipe Diameter	mm	350	
Cooling	Radiator Cooling Air Flow	m³/s	34.0	
	Max Restriction to Cooling Air Flow	Pa	130	
	Max Radiator Air-On Temperature	°C	50	
	Maximum Coolant Temperature	°C	104	
	Coolant Capacity - Engine Only	litres	157	
	Total Coolant Capacity	litres	490	
Oil	Total Oil Capacity incl Filters	litres	280	
	Typical Oil Pressure at Rated Speed	kPa	414	
	Typical Oil Consumption (>250hrs Operation)	litres/h	1.04	
Thermal	Heat Rejection to Engine Cooling Water	kW	450	500
	Heat Rejection to Charge Cooler	kW	400	455
	Heat Radiated From Engine (Typical)	kW	160	175
Elec	Electrical System Voltage	V	24	
	Battery Type		4 (Series-Parallel) 624	
	Battery Capacity SAE CCA	A	2020	

ALTERNATOR

CGT STAMFORD PI 734

	SI Units	PRIME	STANDBY	
General Data	Manufacturer	Cummins Generator Technologies - STAMFORD		
	Model (may vary with voltage)	PI 734 F	PI 734 F	
	Operating Temperature	°C	40	27
	Coupling / No. of Bearings	Direct / Single Bearing		
	Phase / Poles / Winding Type	3-Phase / 4-Pole / Winding 311		
	Power Factor	Cos Φ = 0.8		
	Excitation	Separately excited by PMG		
	Insulation System	Class H		
	AVR Type	MX 321		
	Voltage Regulation	± 0.5%		

All specifications and design are subject to change without notice



G2250SCU5

Jan 2017

STANDARD CONTROL SYSTEM BC 7210 Digital Auto Start

The standard control system for Export products is **BC 7210** (photo), based on the Deep Sea Electronics DSE7210 Digital Auto Start controller.

This provides for the manual and automatic remote start of the generator with a LCD digital display of :

- Coolant Temperature, with integral high temperature protection
- Oil Pressure, with integral low pressure protection
- Volts, Amps and Frequency
- Engine operating hours
- Battery volts

Also featuring :

- Automatic cool-down timer function
- Emergency Stop button
- Ample auxiliary inputs/outputs for optional features
- Optional - battery charger and door mounted illuminated switch.



CONTROL SYSTEM OPTIONS

BC 7310 & BC 7320 control systems (just the DSE modules shown here) provide complete power monitoring and protection facilities. Compared to BC 7210, addition features include :

- Pre-alarms for Low Oil Pressure and High Coolant Temperature
 - Digital display of kW, kVA and Power Factor
 - Under/Over Volts protection
 - Over Current Protection
 - Full RS485 Telemetry implementation as well as full SAE J1939 CANBus implementation.
- In fact, all generating sets driven by engines with onboard ECU/CANBus come with this system as standard.

The BC 7320 provides full AMF functionality with integrated mains monitoring and generator/mains contactor control.



Finally, **BC 8610 & BC 8620** control systems provide the same features as BC 7310 & BC 7320 respectively, plus :

- BC 8610 - Set-to-Set Synchronisation
- BC 8620 - Single Set-to-Mains Synchronisation with integrated mains monitoring

For Multi Set-to-Mains synchronisation, each set requires BC 7510 with the addition of one mains monitoring panel **BC 8660** (not illustrated). See the Synchronisation Guidelines for further details.

CONTROL SYSTEM OPTIONS - X-RANGE

The X-Range of control systems has been developed to suit larger generating sets (>500kVA) for the UK and Projects market.

The entry level is **Remote Start** and provides for the manual and automatic remote start of the generator with LCD digital display all operating parameters including :

- Coolant temperature with high temperature alarm and shutdown
- Oil pressure with low pressure alarm and shutdown
- Engine operating hours, battery charge volts and amps
- Volts, with Under/Over Volts protection
- Amps, with Over Current protection
- Frequency, kW, kVA, Power Factor

The **Automatic Mains Fail** variant adds full AMF functionality with integrated mains monitoring and generator/mains breaker control.

The **Generator Parallel** system makes provision for set-to-set synchronisation, whilst the Mains Parallel version allows single set-to-mains synchronisation with integrated AMF functionality.

By means of the **Multi-Set Mains Parallel** system (not illustrated) a number of sets can be synchronised with each other and the mains supply.



All designs and specifications subject to change without notice